


Specifications


Nominal Voltage		12V
Rated capacity (10 hour rate)		70Ah
Dimensions	Length	260±2mm(10.24inch)
	Width	168±2mm(6.61inch)
	Height	211±2mm(8.31inch)
	Total Height	215±2mm(8.46inch)
Approx. Weight		21.8kg(48.04lbs)±3%



Outer dimensions (mm)

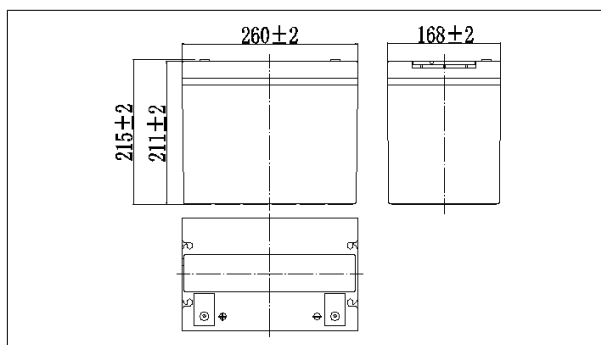

Terminal Type (mm)

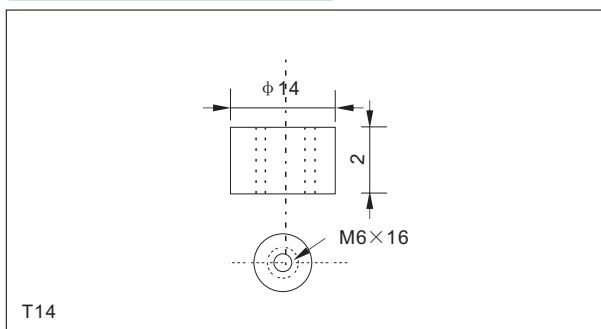

Characteristics

Capacity (25°C)	10HR(10.8V)	70Ah
	3HR(10.8V)	52.5Ah
	1HR(10.5V)	39.1Ah
Terminal type		T14
Internal resistance (Fully charged, 25°C)		Approx. 5.5m Ω
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 months	Remaining Capacity:91%
	6 months	Remaining Capacity:82%
	12 months	Remaining Capacity:65%
Nominal operating temperature		25°C ±3°C(77°F ±5°F)
Operating temperature range	Discharge	-15°C~50°C(5°F~122°F)
	Charge	-10°C~50°C(14°F~122°F)
	Storage	-20°C~50°C(-4°F~122°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 15.00V Temperature compensation: -30mV/°C
Maximum charging current		21A
Maximum discharge current		700A(5 sec.)
Designed floating life(20°C)		10years

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

Constant Current Discharge Characteristics Unit:A(25°C,77°F)


F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	137	112	67.9	42.0	25.6	18.2	14.3	12.1	8.57	7.13	3.78
9.90V	132	109	66.5	41.4	25.4	18.1	14.2	12.1	8.52	7.11	3.77
10.2V	127	105	64.5	40.3	25.2	18.0	14.1	12.0	8.46	7.09	3.76
10.5V	121	102	62.9	39.1	24.8	17.9	14.0	11.9	8.40	7.05	3.74
10.8V	115	96.3	60.6	37.8	24.2	17.5	13.6	11.5	8.15	7.00	3.71

Constant Power Discharge Characteristics Unit:W(25°C,77°F)


F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	1474	1230	762	479	296	214	168	143	102	85.1	45.3
9.90V	1430	1200	747	472	294	213	167	143	101	84.9	45.2
10.2V	1371	1156	724	460	292	211	166	142	100	84.7	45.1
10.5V	1312	1177	706	445	287	210	165	141	99.8	84.2	44.8
10.8V	1238	1058	680	431	280	206	160	136	96.8	83.6	44.5

Note: The above characteristics data can be obtained within three charge or discharge cycles.


Discharge characteristics(25°C)

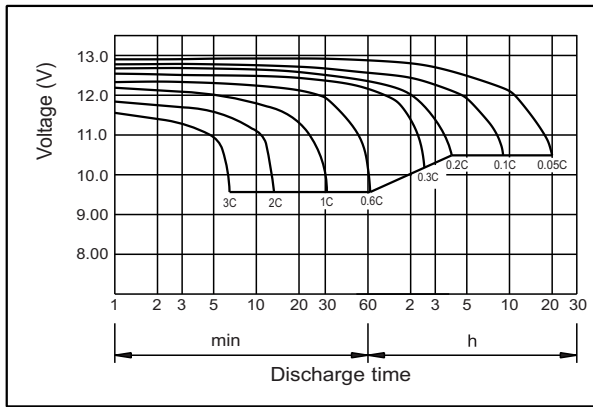


Charging characteristics (25°C)

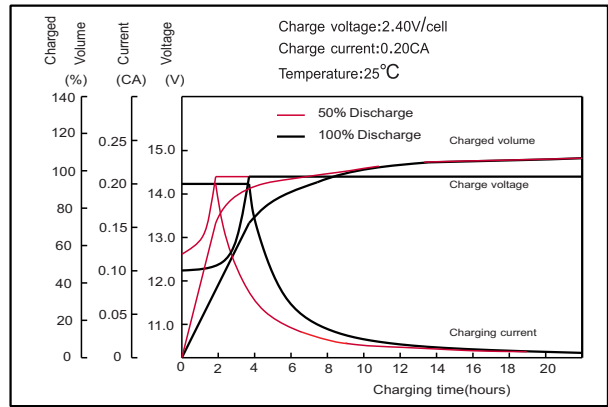


Temperature effects on Capacity

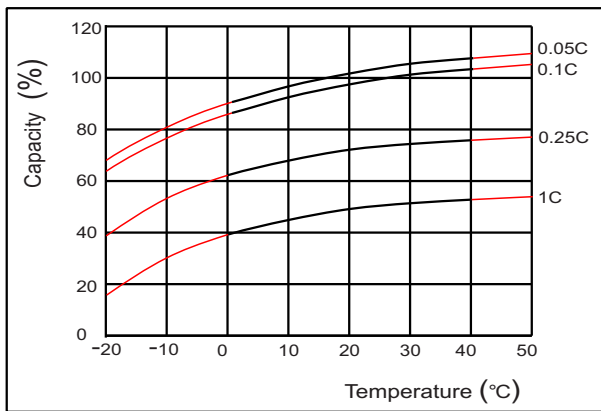


Self-discharge characteristics

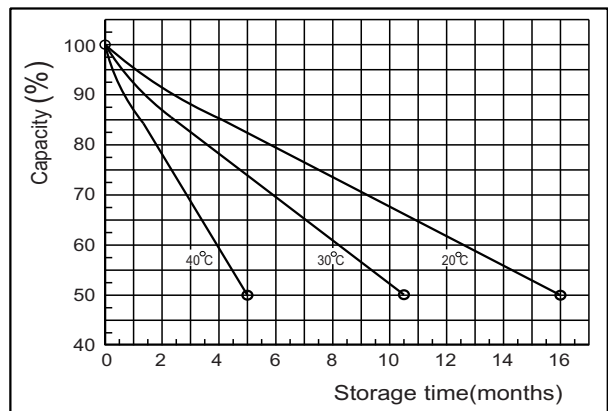


Floating life on Temperature

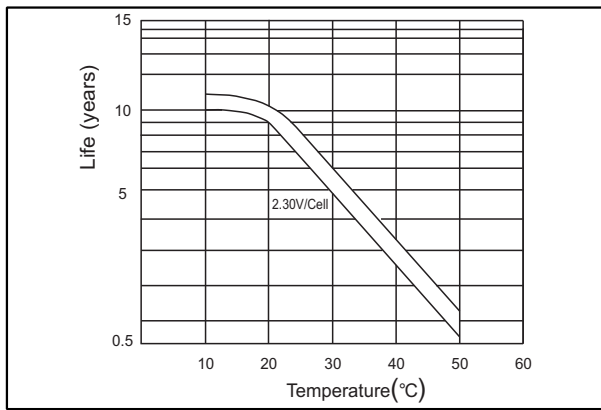

Cycle life on D.O.D (25°C)

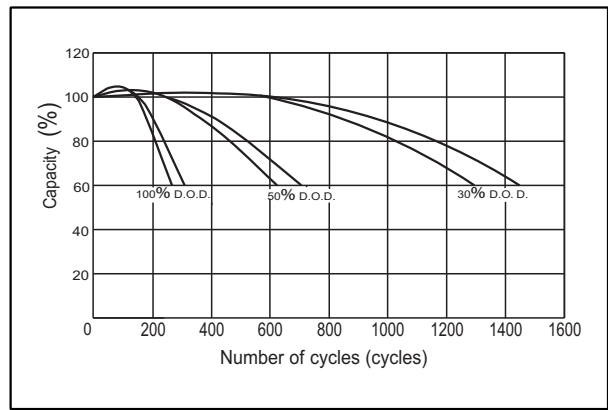

The relationship for OCV and Capacity (25°C)

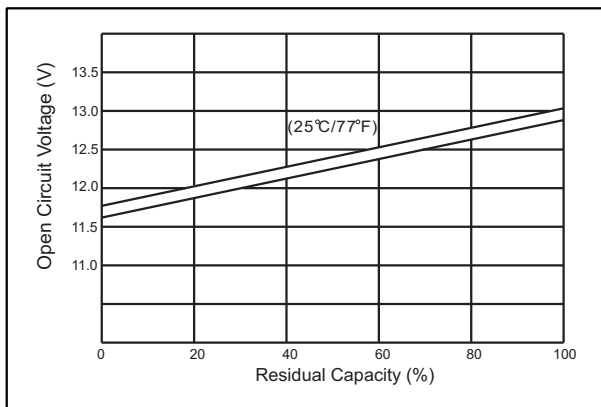

The relationship for Charging voltage and Temperature

